
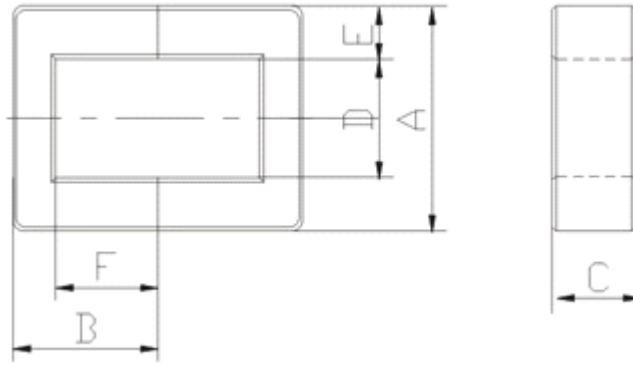


UF CORES

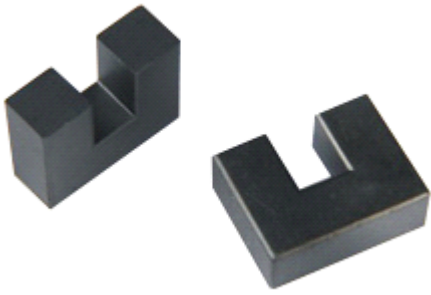

UF CORES (Dimensions)

TYPE	Dimensions							unit: mm
	A	2B	C	D	E	2F	G	W (g/set)
UF9.8/14	9.80±0.20	14.20±0.20	2.70±0.20	4.20±0.20	8.40±0.40	8.40±0.40	2.90±0.10	1.3
UF9.8/14A	9.80±0.20	14.20±0.20	3.10±0.20	4.20±0.20	8.40±0.40	8.40±0.40	2.90±0.10	1.5
UF10/15	10.15±0.30	14.80±0.40	2.90	4.15min	8.40 +0.70 -0.00	8.40+0.70 -0.00	3.00±0.20	1.5
UF10.5/16	10.50±0.30	15.80±0.40	5.00±0.30	5.50±0.30	10.80±0.40	10.80±0.40	2.50±0.20	2.5
UF13/20	13.50±0.30	19.80+0.00 -0.50	5.00	6.50min	12.20+0.60 -0.00	12.20+0.60 -0.00	3.50±0.20	4.0
UF15/22	15.20±0.30	22.40±0.50	6.70	4.90min	11.40+1.40 -0.00	11.40+1.40 -0.00	5.25±0.20	8.5
UF15/23	15.20±0.50	22.80±0.40	6.45±0.30	5.20±0.30	12.80±0.40	12.80±0.40	5.00±0.20	8.6
UF16/20	16.00±0.30	20.00±0.40	6.00±0.15	6.85±0.20	12.00±0.30	12.00±0.30	4.00±0.15	6.7
UF16/22	16.00±0.30	22.00±0.40	6.00±0.15	6.85±0.20	14.00±0.30	14.00±0.30	4.00±0.15	7.3
UF17/33	17.00±0.30	33.20±0.40	6.00±0.10	7.80min	24.00±0.40	24.00±0.40	4.60±0.20	10.0
UF25/28	25.00±0.40	28.00±0.40	7.00±0.30	11.00±0.4 0	14.00±0.60	14.00±0.60	7.00±0.20	18.0

Core Set Parameters

TYPE	C1(mm)	Le(mm)	Ae(mm)	Ve(mm)	AL±25%(nH/N)	
					Lp4	Lp44
PQ20/16	0.60	37.4	62.0	2318.80	3350	3500
PQ20/22	0.73	45.4	62.0	2814.80	2900	3035
PQ26/20	0.39	46.3	119.0	5509.70	5250	5500
PQ26/25	0.47	55.5	118.0	6549.00	4600	4800
PQ27/25	0.48	56.5	130.0	6600.00	4600	4800
PQ32/20	0.33	55.5	170.0	9435.00	6400	6700
PQ32/30	0.46	74.6	161.0	12010.60	4550	4750
PQ35/35	0.45	87.9	196.0	17228.40	4300	4500
PQ40/40	0.51	101.9	201.0	20481.90	4100	4300
PQ50/50	0.34	113.0	328.0	37064.00	6150	6400