


## FT CORES

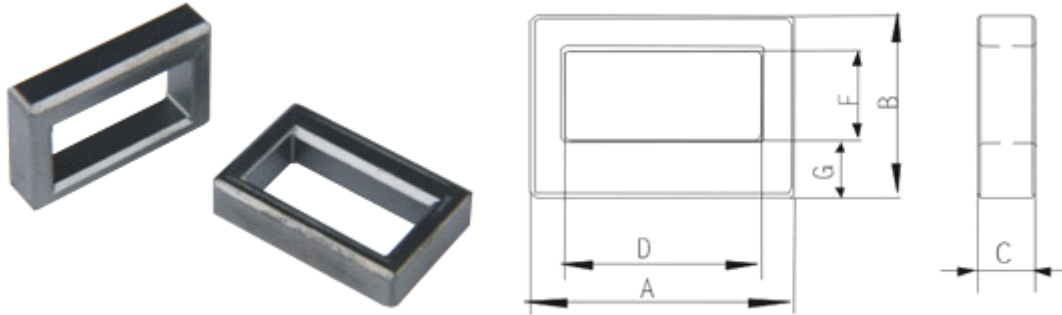

## FT CORES (Dimensions)

TYPE	Dimensions						unit: mm
	A	B	C	D	E	F	W (g/set)
FT19.5/13.8	19.50±0.30	14.20±0.60	5.00±0.30	12.9min	6.80min	4.00±0.20	4.3
FT20.5/13.8	20.60±0.30	14.10±0.30	4.60±0.20	15.70min	7.35min	4.00±0.20	3.8
FT21/15	21.50±0.30	14.90±0.25	3.70±0.15	15.40min	6.65min	4.30±0.15	3.6
FT21/15A	21.50±0.30	14.90±0.25	4.50±0.20	15.90min	7.60min	8.70±0.20	4.1
FT40/30	40.70±0.40	30.80±0.40	8.70±0.30	26.60min	13.10min	8.70±0.30	36.0

## Core Set Parameters

TYPE	C1(mm)	Le(mm)	Ae(mm)	Ve(mm)	AL±25%(nH/N)		
					Lp4	Lp44	Lh10
FT19.5/13.8	3.03	50.6	16.7	845.02	2050	2850	4100
FT20.5/13.8	4.37	52.9	12.1	640.09	1200	1800	2700
FT21/15	4.37	55.1	12.6	694.26	1430	2000	2860
FT21/15A	4.19	56.2	13.4	753.08	1450	2050	2900
FT40/30	1.55	104.0	67.1	6978.40	3950	5400	7900